


E-glass Multiaxial Fabrics

Product Code: E-TLX750

Vesion: 2015

Page 1 of 1

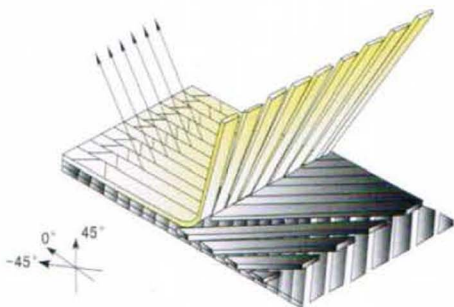

E-TLX750

E: Fiber Type E-Glass
 Architecture: 0、 ±45° Series
 750: Total Weight 22.30oz/sq.yd / 756g/sq.m

Roll Specifications			Fiber Architecture Data
Roll Width: 50 in. / 1270 mm	Roll Weight: 110 lbs / 50 kg	Roll Length: 56 yd / 52 m	0° : 7.31oz/sq.yd / 248 g/sq.m
Acceptance Limits: ±5 mm	±2%	±0.5 m	+45° : 7.40oz/sq.yd / 251g/sq.m
Technical Parameters			- 45°: 7.40oz/sq.yd / 251 g/sq.m
Area Weight (g/m ²)	Moisture Content (%)	Loss on Ignition (%)	
756 (±5%)	≤0.20	0.2—1.0	

*Packaging: Bag with polyester film, Carton on Pallet.

**Total weight refers to reinforcement material only (does not include stitching weight).

***Storage: Unless otherwise specified, fiberglass products should be stored in a dry, cool and rain-proof area. The room temperature and humidity should be always maintained at 15℃~35℃ and 35%~65% respectively.